



Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An agency of  
Industry Canada

CA 2391330 A1 2001/01/11

(21) **2 391 330**

(12) **DEMANDE DE BREVET CANADIEN  
CANADIAN PATENT APPLICATION**


(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 1999/07/02  
(87) Date publication PCT/PCT Publication Date: 2001/01/11  
(85) Entrée phase nationale/National Entry: 2002/01/02  
(86) N° demande PCT/PCT Application No.: EP 1999/004628  
(87) N° publication PCT/PCT Publication No.: 2001/001893

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> A61F 2/44  
(71) Demandeur/Applicant:  
SPINE SOLUTIONS INC., US  
(72) Inventeurs/Inventors:  
MARNAY, THIERRY, FR;  
BEYERSDORFF, BORIS, DE  
(74) Agent: MARKS & CLERK

(54) Titre : **IMPLANT INTERVERTEBRAL**

(54) Title: **INTERVERTEBRAL IMPLANT**

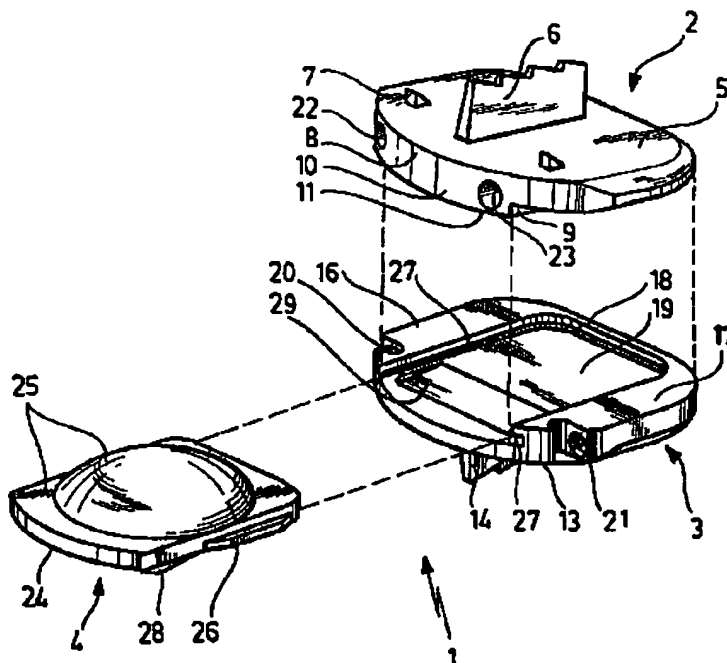

(57) **Abrégé/Abstract:**

The invention relates to an intervertebral implant (1), comprising an upper part (2) that has a support surface (5) for a vertebral body, and a lower part (3) that has a support surface (13) for an adjacent vertebral body. Contact elements (20, 21, 22, 23) are positioned on said upper part and said lower part and can be accessed from one side of the implant respectively, with an handling instrument. The aim of the invention is to minimize the structural height of the intervertebral implant (1) for insertion into an intervertebral space. To this end, the upper part (2) and the lower part (3) each have projections or recessed sections (9, 10, 16, 17, 19) which are oriented towards the other part and are laterally offset from each other in such a way that they engage in each other as the upper part (2) approaches the lower part (3). The contact elements (20, 21, 22, 23) are arranged on the upper part (2) and on the lower part (3) in projections (10, 16, 17) of these parts respectively, and the contact elements (20, 21, 22, 23) of the upper part (2) and the lower part (3) lie adjacent to one another and at least partially overlap in the direction of the height of the intervertebral implant (1).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
11. Januar 2001 (11.01.2001)

PCT


(10) Internationale Veröffentlichungsnummer  
WO 01/01893 A1

- (51) Internationale Patentklassifikation<sup>7</sup>: A61F 2/44 (72) Erfinder; und  
(21) Internationales Aktenzeichen: PCT/EP99/04628 (75) Erfinder/Anmelder (*nur für US*): MARNAY, Thierry  
[FR/FR]; 290, avenue Valéry Larbaud, F-34080 Montpel-  
lier (FR). BEYERSDORFF, Boris [DE/DE]; Möhringer-  
strasse 5, D-78532 Tuttlingen (DE).  
(22) Internationales Anmeldedatum: 2. Juli 1999 (02.07.1999)  
(25) Einreichungssprache: Deutsch (74) Anwalt: BÖHME, Ulrich; Hoeger, Stellrecht & Partner  
Patentanwälte GbR, Uhlandstrasse 14c, D-70182 Stuttgart  
(26) Veröffentlichungssprache: Deutsch (DE).  
(71) Anmelder (*für alle Bestimmungsstaaten mit Ausnahme von* (81) Bestimmungsstaaten (*national*): AE, AU, BR, CA, CZ,  
US): SPINE SOLUTIONS INC. [US/US]; 505 Park Ave., HR, HU, ID, IL, JP, KP, KR, MX, NZ, PL, RO, RU, SG,  
14th floor, New York, NY 10022 (US). TR, US, YU, ZA.

[Fortsetzung auf der nächsten Seite]

(54) Title: INTERVERTEBRAL IMPLANT

(54) Bezeichnung: ZWISCHENWIRBELIMPLANTAT

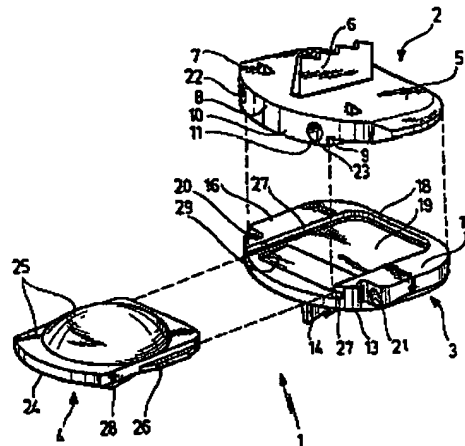

(57) Abstract: The invention relates to an intervertebral implant (1), comprising an upper part (2) that has a support surface (5) for a vertebral body, and a lower part (3) that has a support surface (13) for an adjacent vertebral body. Contact elements (20, 21, 22, 23) are positioned on said upper part and said lower part and can be accessed from one side of the implant respectively, with an handling instrument. The aim of the invention is to minimize the structural height of the intervertebral implant (1) for insertion into an intervertebral space. To this end, the upper part (2) and the lower part (3) each have projections or recessed sections (9, 10, 16, 17, 19) which are oriented towards the other part and are laterally offset from each other in such a way that they engage in each other as the upper part (2) approaches the lower part (3). The contact elements (20, 21, 22, 23) are arranged on the upper part (2) and on the lower part (3) in projections (10, 16, 17) of these parts respectively, and the contact elements (20, 21, 22, 23) of the upper part (2) and the lower part (3) lie adjacent to one another and at least partially overlap in the direction of the height of the intervertebral implant (1).

(57) Zusammenfassung: Um bei einem Zwischenwirbelimplantat (1) mit einem eine Stützfläche (5) für einen Wirbelkörper aufweisenden Oberteil (2) und einem eine Stützfläche (13) für einen benachbarten Wirbelkörper aufweisenden Unterteil (3), an denen jeweils von einer Seite des Zwischenwirbelimplantats her zugängliche Angriffselemente (20, 21, 22, 23) für ein Handhabungsinstrument angeordnet sind, die Bauhöhe des Zwischenwirbelimplantats (1) beim

[Fortsetzung auf der nächsten Seite]

WO 01/01893 A1

## INTERVERTEBRAL IMPLANT

The invention relates to an intervertebral implant, having an upper part that has a support face for a vertebra and a lower part that has a support face for an adjacent vertebra, on each of which parts engagement elements, which are accessible from one side of the intervertebral implant, for a manipulation instrument are disposed, in order to minimize the structural height of the intervertebral implant upon insertion into an intervertebral space.

One such intervertebral implant is known for instance from U.S. Patent 5,314,477. This intervertebral implant is used to replace a disk removed from the intervertebral space, and accordingly the intervertebral implant must have a relatively low structural height, since it has to fit into the gap between vertebrae. This is particularly difficult if an additional pivot insert is also embedded between the upper part and the lower part, as is the case in the known intervertebral implant of U.S. Patent 5,314,477.

But even in two-piece intervertebral implants, difficulties also arise, especially if the implants also have pins and other protrusions on their support faces that are intended for anchoring the intervertebral implant in the bone. Often, these parts can be inserted only by widening the intervertebral space greatly. Not only is this difficult, but it also presents the risk of injuries.

Since the intervertebral space has a relatively low height, it is also difficult for engagement elements that a manipulation instrument can engage to be secured to both parts of the intervertebral implant. It is conventional to

have such manipulation instruments engage the upper part and the lower part separately, for instance by means of pins that are inserted into bores on the upper part and lower part, so that with the manipulation instrument, the two parts of the intervertebral implant can be inserted into the intervertebral space and can optionally also be varied in terms of their spacing from one another, thereby allowing a certain spreading open of the intervertebral space. In this respect, reference is made to the pincerlike manipulation instrument of U.S. Patent 5,314,477.

Because of the strong forces, it is necessary to provide a certain structural height for the engagement elements; for instance, the receiving bores must have a certain diameter. This dictates a minimum structural height for the upper part and for the lower part, and in conventional intervertebral implants, the structural heights of the upper part and lower part are thus added together, so that even if the upper and lower parts rest directly on one another, a relatively great structural height of the intervertebral implant is still unavoidable.

It is the object of the invention to embody an intervertebral implant of this generic type in such a way that the minimum structural height is reduced, to make it easier to insert the intervertebral implant into the intervertebral space.

In an intervertebral implant of the type described at the outset, this object is attained in accordance with the invention in that it is proposed that the upper part and lower part each have protrusions and recesses aimed at the respectively other part, which are offset laterally from one another in such a way that when the upper part has been

brought close to the lower part they mesh with one another;  
and that the engagement elements on the upper part and on the  
lower part are each disposed in protrusions of these parts in  
such a way that the engagement elements of the upper part and  
5 lower part are located side by side and at least partly  
overlap in the direction of the height of the intervertebral  
implant.

In such an embodiment, a minimal structural height of  
the two intervertebral implant parts resting on one another  
10 can be attained, since the engagement elements, which cannot  
fall below a minimal structural height, are each disposed in  
protrusions of the upper part and lower part, or in other  
words in the parts of the upper part and lower part that have  
the greatest structural height. These regions of great  
15 structural height are embodied as protrusions, next to which  
are respective recesses, into which the protrusions of the  
respectively other part can dip. As a result, on the one  
hand, the engagement elements for the manipulation  
instruments are located side by side, and on the other, they  
20 can at least partly overlap, so that the total structural  
height of the parts resting on one another of the  
intervertebral implant can be reduced markedly compared to  
conventional intervertebral implants. The result is  
accordingly an interlocked arrangement of the upper and lower  
25 parts, with maximal exploitation of the available material  
height.

It is favorable if the engagement elements are  
insertion openings for pinlike retaining elements of a  
manipulation instrument; because of the described  
30 construction, these insertion openings can have a relatively  
large diameter and can thus receive strong retaining pins,  
and nevertheless a relatively low structural height of the

intervertebral implant with parts resting directly on one another is obtained.

5 It is advantageous if the insertion openings extend substantially parallel to the support faces; once again, this prevents an increase in the structural height of the intervertebral implant parts.

10 In a preferred embodiment, it is provided that the lower part has a central indentation, opposite the lower support face, which indentation is surrounded by a U-shaped edge. Thus with the lower part and upper part resting directly on one another, the indentation serves to receive a protrusion on the upper part.

15 It is advantageous if the upper part has a central protrusion that fits substantially in complimentary fashion into the indentation; that is, the total volume of the indentation is utilized for the protrusion.

It is also advantageous if the engagement elements of the lower part are disposed on the two ends of the U-shaped edge, or in other words are located on the outside.

20 Conversely, the engagement elements of the upper part can be disposed on the central protrusion of the upper part, or in other words are located farther inward than the engagement elements of the upper part.

25 In particular, the engagement elements of the upper part can be disposed near the lateral edges of the central protrusion, so that for the upper part as well, the spacing of the engagement elements can be selected to be relatively great; as a result, both the upper part and the lower part

can be reliably secured against skewing.

5 It should already be noted here that the words "lower part" and "upper part" do not necessarily say anything about the installed position of the intervertebral implant in the spinal column; the part called the "lower part" could in fact be above in the spinal column. What is essential is merely that the upper part and lower part define the intervertebral implant on opposite sides of the implant.

10 It is especially advantageous if the upper part and/or the lower part is embodied in substantially platelike fashion; these parts naturally, in accordance with the design of the invention, have protrusions and recesses that are oriented toward the respectively other part. The platelike embodiment, however, leads as a whole to a very low  
15 structural height of the intervertebral implant.

In a preferred embodiment, the lower part and the upper part each have a respective receptacle for a pivot insert. This pivot insert, which is placed between the upper part and lower part after the insertion of the intervertebral implant,  
20 supports the upper part and lower part against one another; it takes on a resilient function, for instance, and furthermore leads to a certain pivotability of the two parts of an intervertebral implant relative to one another, so that a pivotability of the adjacent vertebra is thus attainable as  
25 well.

In particular, it is advantageous if the pivot insert has at least one spherical support face, which engages the correspondingly spherically shaped receptacle.

It is favorable if the spherical receptacle is disposed

in the central protrusion of the upper part.

It is also advantageous if the central indentation of the lower part forms the receptacle for the pivot insert.

5 According to a preferred embodiment of the invention, it is provided that the pivot insert can be inserted from the side into the receptacle, which has the engagement elements for a manipulation instrument. This is the side from which the upper part and lower part are introduced into the intervertebral space, and it is also from this side that the  
10 pivot insert can then be thrust between the already-inserted parts of the intervertebral implant.

It is favorable if the pivot insert is insertable into the receptacle along a guide.

15 In that the insert as well is preferably embodied substantially in platelike fashion.

An especially favorable design is obtained if the insert substantially completely fills up the central receptacle and with its spherical support face protrudes from the receptacle.

20 The ensuing description of preferred embodiments of the invention serves in conjunction with the drawing to provide further explanation. Shown are:

Fig. 1: a perspective exploded view of an intervertebral implant with an upper part, a lower part, and  
25 a pivot insert that can be inserted between them;

Fig. 2: a perspective exploded view of the upper part



and the lower part of the intervertebral implant, without an inserted pivot insert;

Fig. 3: a view similar to Fig. 2 with the pivot insert inserted into the lower part;

5 Fig. 4: a perspective view of the upper part and the lower part of the intervertebral implant with maximum mutual proximity;

Fig. 5: a front view of the intervertebral implant of Fig. 4;

10 Fig. 6: a perspective view of the intervertebral implant with the pivot insert inserted; and

Fig. 7: a cross-sectional view of the intervertebral implant of Fig. 6.

15 The intervertebral implant 1 shown in the drawing includes three parts, namely a platelike upper part 2, a platelike lower part 3, and a substantially platelike pivot insert 4.

20 The upper part 2 is embodied flat on its top, thus creating a support face 5, on which various kinds of protrusions 6, 7 are disposed which serve the purpose of anchoring the upper part 2 in a vertebra that rests, with its end face toward an intervertebral space, on the support face 5.

25 The upper part 2 is substantially rectangular in cross section; in the exemplary embodiment shown, a longitudinal edge 8 curves outward.

On the two short sides of this rectangle, the thickness of the platelike upper part 2 is less than in the central region, so that along the short sides of the upper part 2, downward-pointing recesses 9 each extending parallel to these edges are formed that are open toward the outside. The central region of the upper part 2 is located between the two recesses 9 and thus has a greater thickness or height and thus forms a downward-pointing protrusion 10 embodied between the two recesses 9. This protrusion is defined by an underside 11, which extends substantially parallel to the support face 5 and in which there is a spherical indentation 12, which forms a bearing plate for the pivot insert 4.

The lower part 3 of the intervertebral implant 1 is also platelike in embodiment and on its underside has a flat support face 13 with protrusions 14 and 15, which correspond to the protrusions 6 and 7 of the support face 5. On the side remote from the support face 13, the thickness of the lower part 3 is less in the central region than in an outer region. This outer region of greater thickness has the form of a U, with two parallel legs 16, 17, which extend parallel to the short edges of the lower part 3, which in cross section is embodied similarly to the upper part 2, and with a crosspiece 18 that connects the two legs 16 and 17 on one end. The region enclosed by the legs 16 and 17 and the crosspiece 18 forms a central indentation 19, whose area is substantially equivalent to the area of the central protrusion 10 of the upper part 2, while the disposition and length of the legs 16 and 17 correspond essentially to the disposition and length of the recesses 9 on the upper part 2. As a result, it is possible to place the upper 2 and lower part 3 on one another in such a way that the central protrusion 10 of the upper 2 dips into the central indentation 19, while the legs 16 and 17 of the lower part 3

dip into the recesses 9 of the upper part 2 (Fig. 4); in this position, the upper part 2 and lower part 3 have maximum proximity to one another and a minimal structural height.

5 The dimensions are selected such that the various recesses are essentially filled completely by the protrusions dipping into them.

10 Blind bores 20 and 21 are machined into the two legs 16 and 17 of the lower part 3, extending parallel to these legs 16, 17 from their free ends; the diameter of these bores is relatively great in proportion to the height of the legs 16, 17, and this diameter is in fact greater than the thickness or height of the lower part 3 in the region of the central indentation 19.

15 Blind bores 22 and 23, which extend parallel to the blind bores 20 and 21 in the lower part 3, are machined into the central protrusion 10 of the upper part 2, in the vicinity of its side edges. These blind bores 22 and 23 again have a relatively great diameter, which corresponds to a substantial portion of the height of the protrusion 10 and is greater than the thickness of the upper part 2 in the region of the recesses 9.

20 When the upper part 2 and lower part 3 rest tightly against one another in the manner described, the blind bores 20 and 21 of the lower part 3 and the blind bores 22 and 23 of the upper part 2 overlap at least partly in the direction of the height of the intervertebral implant 1, as is clearly shown in Figs. 4 and 5.

The blind bores 20, 21, 22 and 23 serve as receptacles for pinlike extensions of a manipulation instrument, not

shown in the drawing, and thus form engagement elements for this manipulation instrument, which in this way separately engages the upper part 2 and the lower part 3. With this manipulation instrument, it is possible to introduce the upper part 2 and the lower part 3 of the intervertebral implant 1 into an intervertebral space; the very low structural height of the intervertebral implant 1 facilitates this introduction, which can be done essentially without major widening of the intervertebral space.

After the introduction of the upper part 2 and lower part 3 in this way, the two parts of the intervertebral implant 1 can be spread apart; that is, their spacing is increased, for instance with the aid of the manipulation instrument that is holding the upper 2 and the lower part 3.

In this spread-open position of the upper part 2 and lower part 3, it is possible to thrust the pivot insert 4 between the upper part 2 and the lower part 3.

This pivot insert is constructed essentially in the shape of a plate, which has a flat underside 24 and a spherically upward-curved top side 25. The outer dimensions of the platelike pivot insert correspond to those of the central indentation 19 in the lower part 3, so that the pivot insert 4 can be thrust into this indentation, filling it up, specifically from the side toward which the blind bores 20, 21, 22, 23 open. Guide strips 26 on the side edges of the pivot insert 4 engage corresponding guide grooves 27 in the legs 16, 17, so that an insertion guide for the pivot insert 4 is formed that fixes it in the lower part 3 after its insertion. The inserted pivot insert 4, after insertion, fills up the indentation 19 and protrudes with its spherically curved top side 25 upward past the top side of

the lower part 3; the spherical top side 25 dips in  
complimentary fashion into the spherically curved indentation  
12 on the underside of the protrusion 10, where with the  
upper part 2 it forms a ball joint, which enables a certain  
5 pivotability of the upper part 2 relative to the lower part 3  
(Fig. 7).

The pivot insert 4 can have a detent protrusion 28 on  
its flat underside 24; when the pivot insert 4 is inserted  
into the lower part 3, this protrusion locks elastically into  
10 a detent recess 29 that is located on the bottom of the  
indentation 19; as a result, the pivot insert 4 is also fixed  
in the insertion direction in the indentation 19.

The upper part 2 and lower part 3 are preferably made  
of physiologically safe metal, such as titanium, while the  
15 pivot insert 4 preferably comprises a likewise  
physiologically safe plastic material, such as polyethylene.  
These support faces 5 and 13 can be embodied in an especially  
bone-compatible way; for instance, this surface can be  
roughened by a coating, so that optimal anchoring to the  
20 adjacent bone material is obtained.

## CLAIMS

1. An intervertebral implant (1), having an upper part (2) that has a support face (5) for a vertebra and a lower part (3) that has a support face (13) for an adjacent vertebra, on each of which parts engagement elements (20, 21, 22, 23), which are accessible from one side of the intervertebral implant, for a manipulation instrument are disposed, characterized in that the upper part (2) and lower part (3) each have protrusions and recesses (10, 19; 16, 17, 9) aimed at the respectively other part, which are offset laterally from one another in such a way that when the upper part (2) has been brought close to the lower part (3) they mesh with one another; and that the engagement elements (22, 23; 20, 21) on the upper part (2) and on the lower part (3) are each disposed in protrusions (10; 16, 17) of these parts in such a way that the engagement elements (22, 23; 20, 21) of the upper part (2) and lower part (3) are located side by side and at least partly overlap in the direction of the height of the intervertebral implant (1).

2. The implant of claim 1, characterized in that the engagement elements (20, 21, 22, 23) are insertion openings for pinlike retaining elements of a manipulation instrument.

3. The implant of claim 2, characterized in that the insertion openings (20, 21, 22, 23) extend substantially parallel to the support faces (5; 13).

4. The implant of one of the foregoing claims, characterized in that the lower part (3) has a central indentation (19), opposite the lower support face (13), which indentation is surrounded by a U-shaped edge (16, 17, 18).

5. The implant of claim 4, characterized in that the upper part (2) has a central protrusion (10) that fits substantially in complimentary fashion into the indentation (19).

6. The implant of one of claims 4 or 5, characterized in that the engagement elements (20, 21) of the lower part (3) are disposed on the two ends of the U-shaped edge (16, 17, 18).

7. The implant of one of claims 5 or 6, characterized in that the engagement elements (22, 23) of the upper part (2) are disposed on the central protrusion (10) of the upper part (2).

8. The implant of claim 7, characterized in that the engagement elements (22, 23) of the upper part (2) are disposed near the lateral edges of the central protrusion (10).

9. The implant of one of the foregoing claims, characterized in that the upper part (2) and/or the lower part (3) is embodied in substantially platelike fashion.

10. The implant of one of the foregoing claims, characterized in that the lower part (3) and the upper part (2) each have a respective receptacle (19; 12) for a pivot insert (4).

11. The implant of claim 10, characterized in that the pivot insert (4) has at least one spherical support face (25), which engages the correspondingly spherically shaped receptacle (12).

12. The implant of claim 11, characterized in that the spherical receptacle (12) is disposed in the central protrusion (10) of the upper part (2).

13. The implant of one of claims 10-12, characterized in that the central indentation (19) of the lower part (3) forms the receptacle for the pivot insert (4).

14. The implant of claim 13, characterized in that the pivot insert (4) can be inserted from the side into the receptacle (19), which has the engagement elements (20, 21, 22, 23) for a manipulation instrument.


15. The implant of claim 14, characterized in that the pivot insert (4) is insertable into the receptacle (19) along a guide (26, 27).



16. The implant of one of claims 10-15, characterized in that the pivot insert (4) is embodied substantially in platelike fashion.

17. The implant of one of claims 11-16, characterized in that the pivot insert (4) substantially completely fills up the central receptacle (19) and with its spherical support face (25) protrudes from the receptacle (19).



FIG. 1

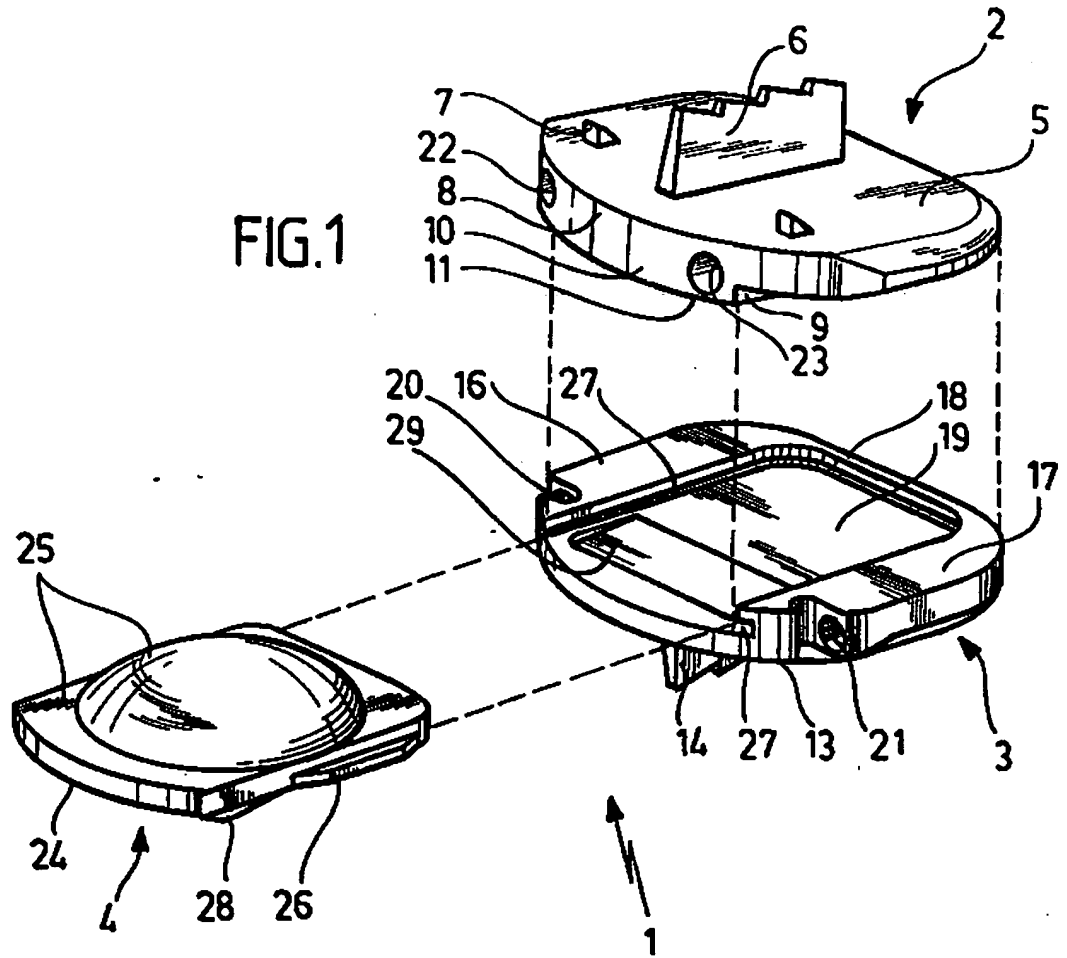

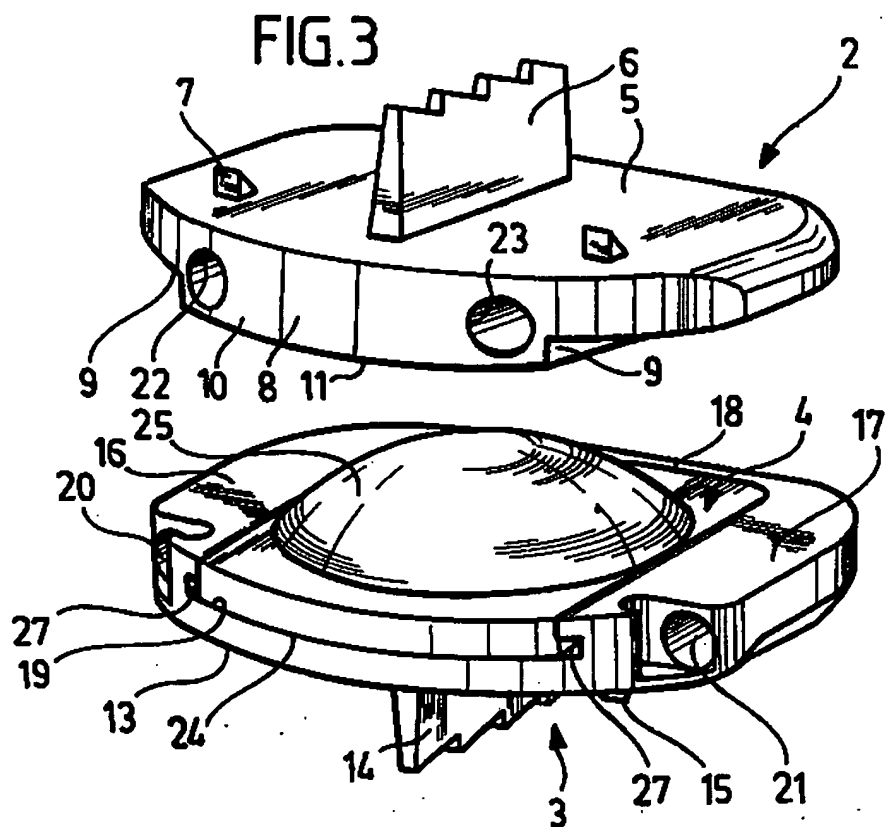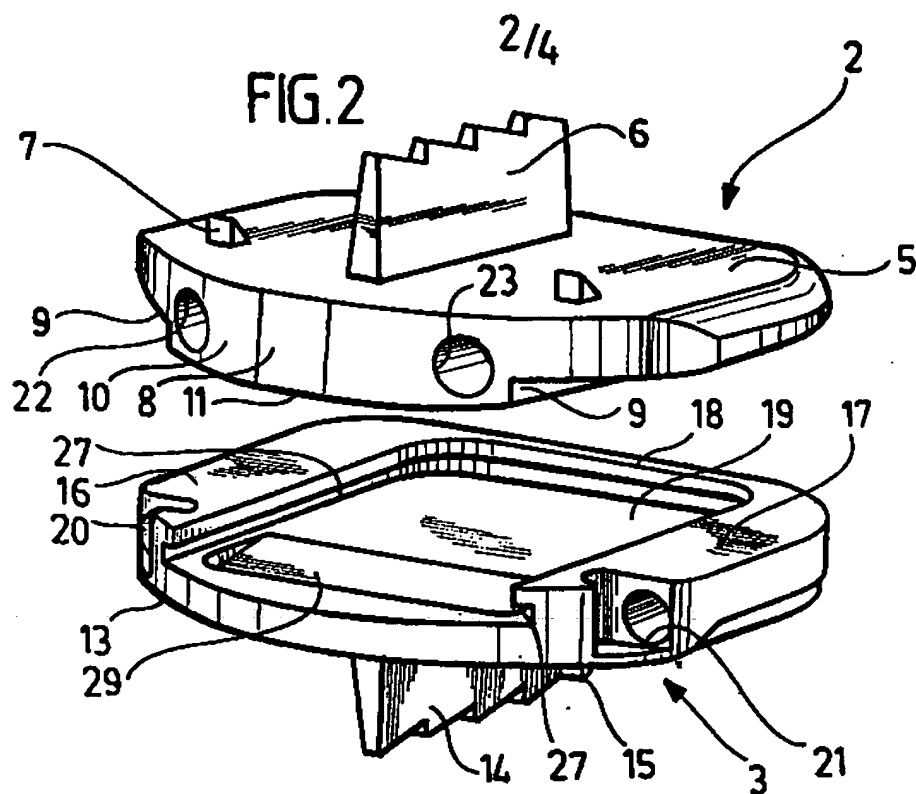

Mark & Clerk

FIG.4

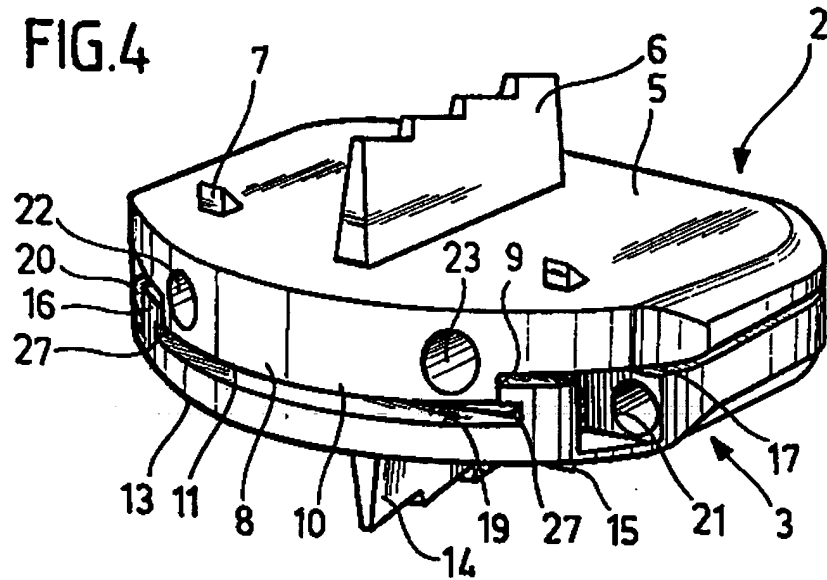


FIG.5

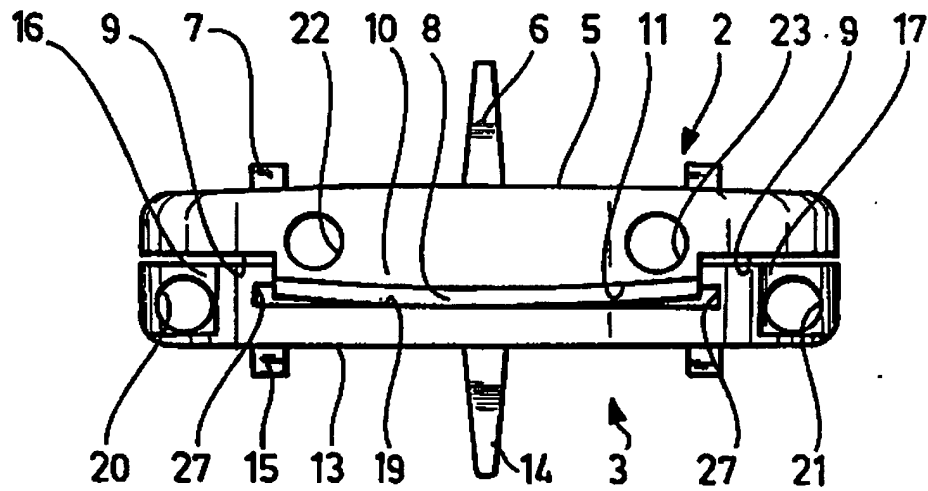


FIG.6

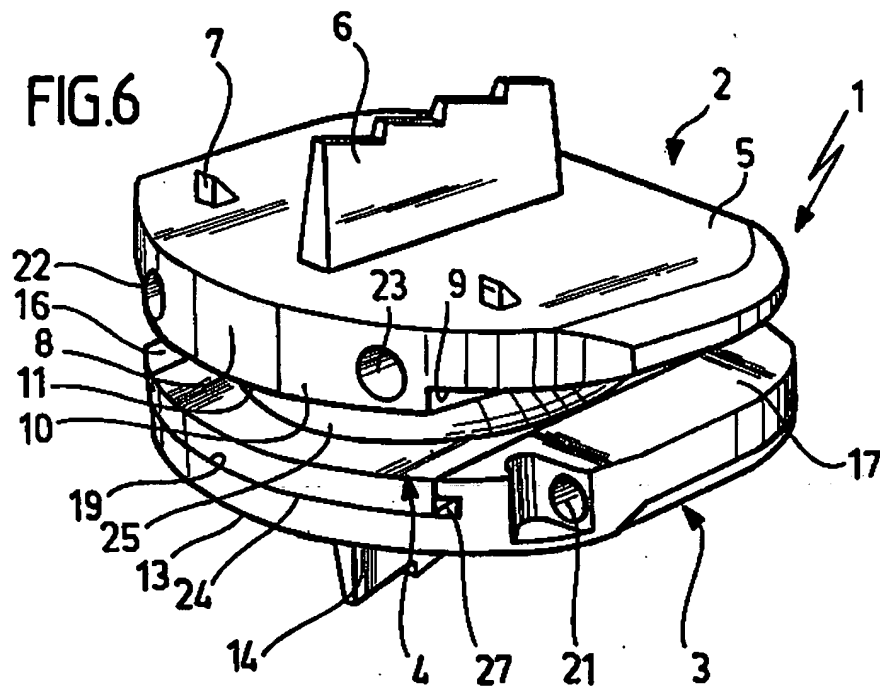


FIG.7

